


2 LAYAR ANTISTATIC BUBBLE FILM

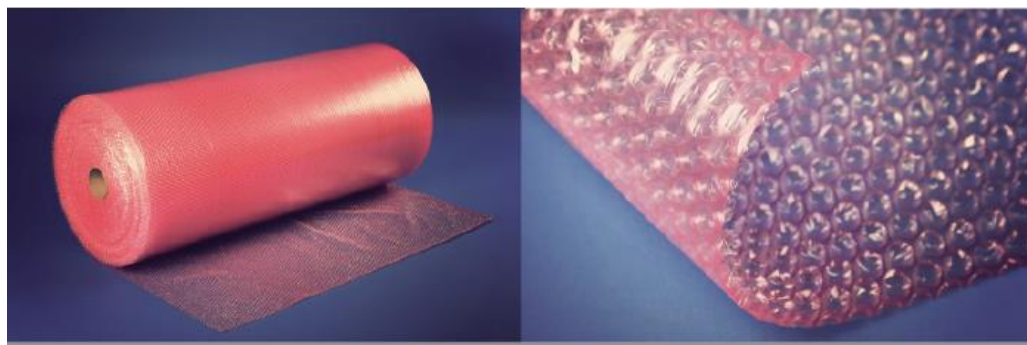

TECHNICAL DATA SHEET

Thickness	4.2mm
Density	92 kg/m³
Roll width	max 1.5 m
Roll length	max 150 m
Color	Pink to slightly red
<i>ESD properties</i>	
Resistance – 10¹⁰ Ω	OK
Voltage – Normal conditions (0-15V)	OK
Voltage after charging – in 2 seconds must drop into less than 100 Volts	OK

Antistatic bubble film contains 6% of long lasting antistatic masterbatch AMPACET 150223 Red AS PE MB to eliminate charges in LDPE and LLDPE during processing and end-use applications.

Masterbatches physical properties:

Specific Gravity:	0.92	
Additive(%):	3 – 6	MDE – 08
Melt Index (g/10 min):	14	ASTM D1238, 190°C/2.16 kg
Bulk Density (g/l):	700	MDE - 66
Light Resistance:	7	
Temperature Resistance:	220°C	

This product has been especially produced for electronic packaging when specific antistatic properties are required.

Manufacturer: PEPI RER

www.pepirer.lv

